


RoHS Compliant

Rev	Modification	Date
A1	Issue	02/13/2020

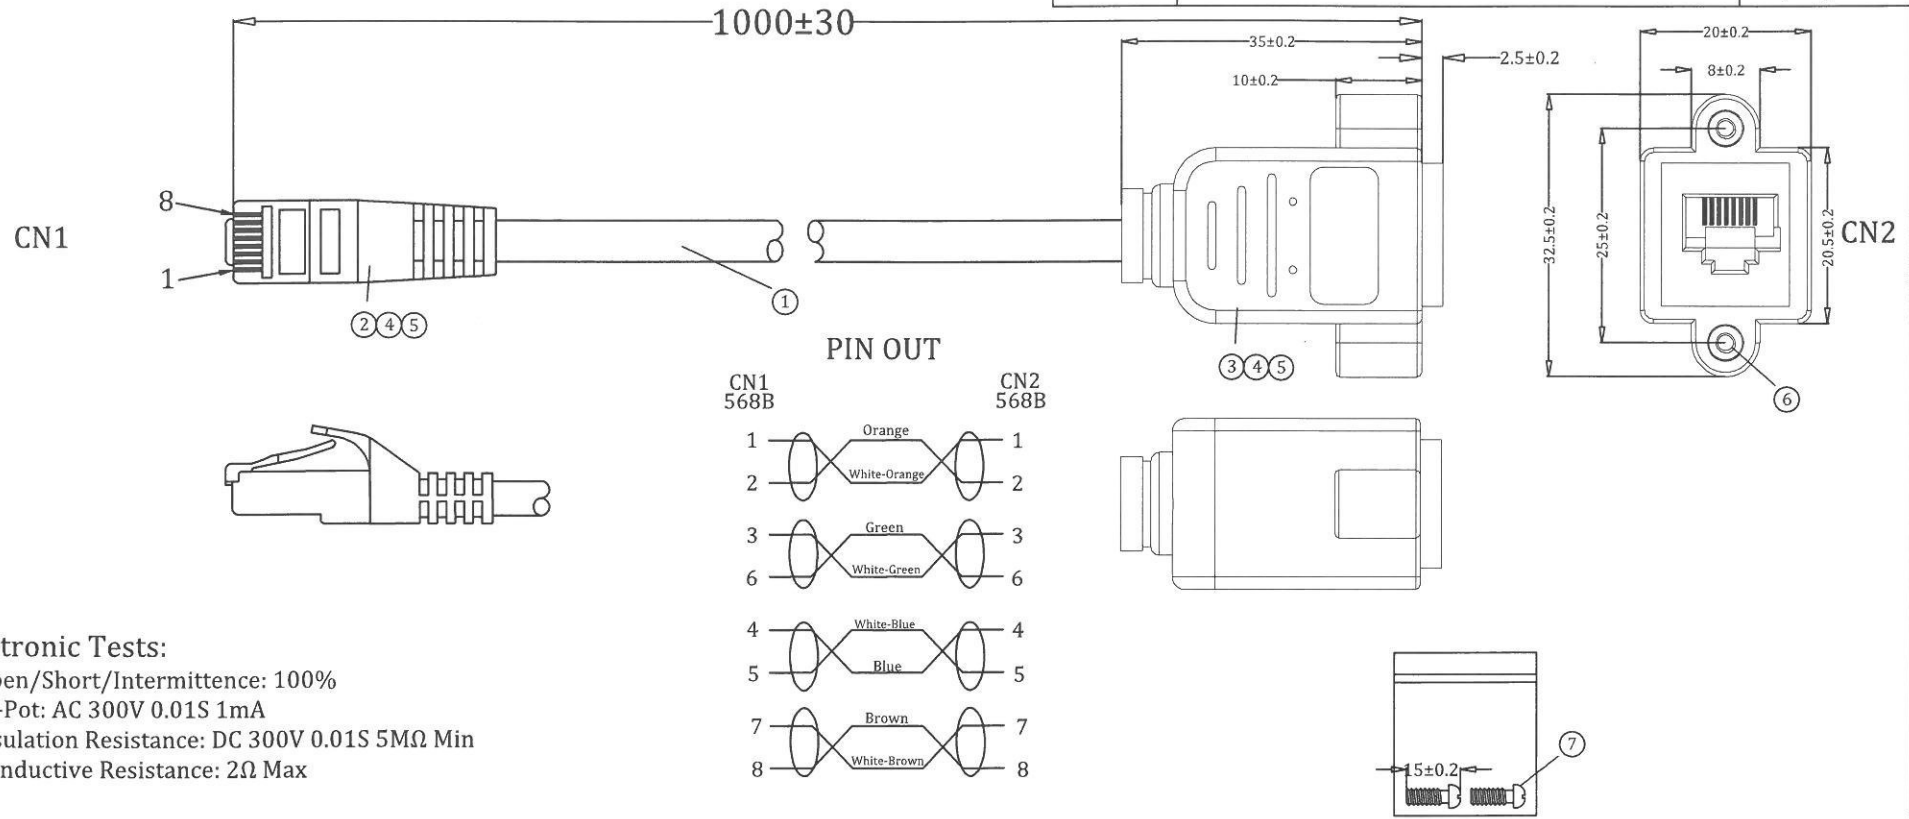

Electronic Tests:

- A. Open/Short/Intermittence: 100%
- B. Hi-Pot: AC 300V 0.01S 1mA
- C. Insulation Resistance: DC 300V 0.01S 5MΩ Min
- D. Conductive Resistance: 2Ω Max

⑦	Screw	Screw, M3, Nickel Plated	2	pcs
⑥	Nut	Nut, M3, Copper	2	pcs
⑤	Outer Mold	45P PVC, Black	13	g
④	Inner Mold	LDPE	3	g
③	Connector	CAT5E, FTP, RJ45 Female, 8P8CS, PIN Gold Flash, Shell Nickel Plated	1	pc
②	Connector	CAT5E, UTP, RJ45 Male, 8P8CS, PIN Gold Flash	1	pc
①	Cable	CAT5E, UTP 26AWG(7/0.16BC)*4P, Black PVC Jacket, OD:5.5± 0.2mm	1000	mm
No.	P/No.	Specifications	Q'TY	Unit

Projection:		Tolerance:	XX= XXX=	Product:	CAT5E FTP M/F Panel Mount Cable
Scale:	None	DWG No.:		Part No.:	
Unit:	MM	Page:	1/1	朝日技研工業株式会社	
Customer:	ASAHI				
Customer Approve:					
Draw:	Kelly Xu				
Approve:	David Han				