

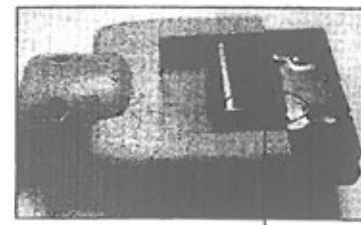




Category	Description	Customer	Customer P/N#	UTECH P/N#	Rev.	Changed by	Date	ECN No.
Series ATA Cable	SATA 7P/F TO SATA 7P/F	朝日技研	110-SATA20-102	110-SATA20-102	A/0		2018-10-31	

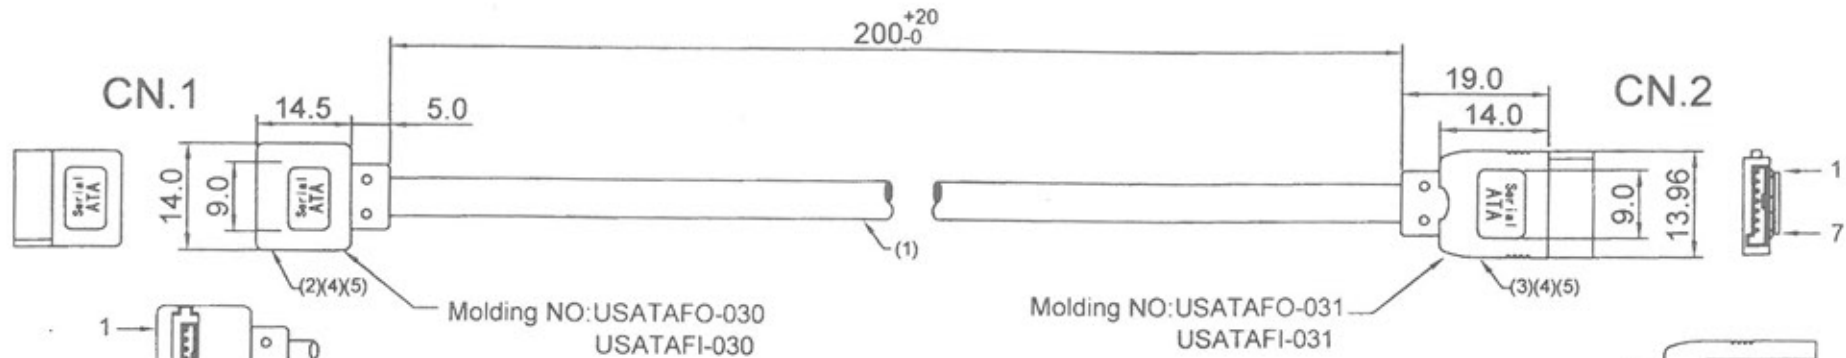

圆形高针弹片，弹性一定要好。

PIN OUT

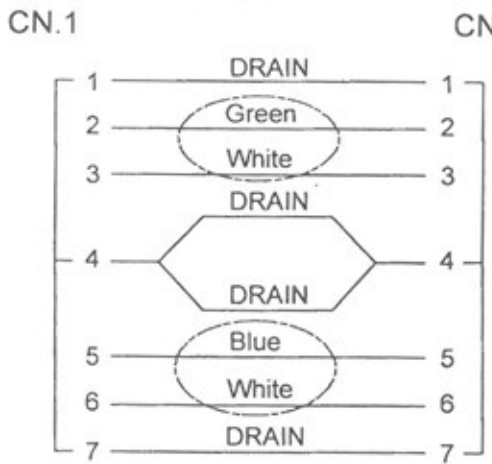

ELECTRICAL TESTING:
a. 100% OPEN&SHORT TEST.
b. HI-POT: 300V AC/100mS/5mA.
c. INSULATION RESISTANCE:20M Ω (MIN) 250V DC.
d. CONTACT RESISTANCE:5 Ω (MAX).

5	PE	PE Plastic,Color:Transparent.	6	g
4	PVC	PVC 50P,Color:Yellow.	10	g
3	CONN	SATA 7P<180°Welding type> Female,Black PBT Insulator,Terminal Gold Flash. (With latch)	1	pcs
2	CONN	SATA 7P<90°Welding type> Female,Black PBT Insulator,Terminal Gold Flash. (右90°)	1	pcs
1	CABLE	UL2725 (2C*26#+AL.MYLAR)*2C+4D+MYLAR+AL+BOD:5.0mm Color:Yellow L=145mm	245	mm
No.	ITEM	DISCRIPTION	Q'TY	UNIT

XX ±0.30	XX° ±0.30°	Engineering Drawing	
X ±0.80	X° ±0.5°		
X. ±1	X°. ±1°	Projection:	
XX. ±5	XX°. ±3°	Unit: mm	Scale:Free
XXX. ±15	XXX°. ±5°	Authorized by:	Approved by:
General Tolerance	Angle Tolerance	Checked by:	Prepared by:

RoHS对应品

DWG. No.: 20120525001 Page: 1/1